



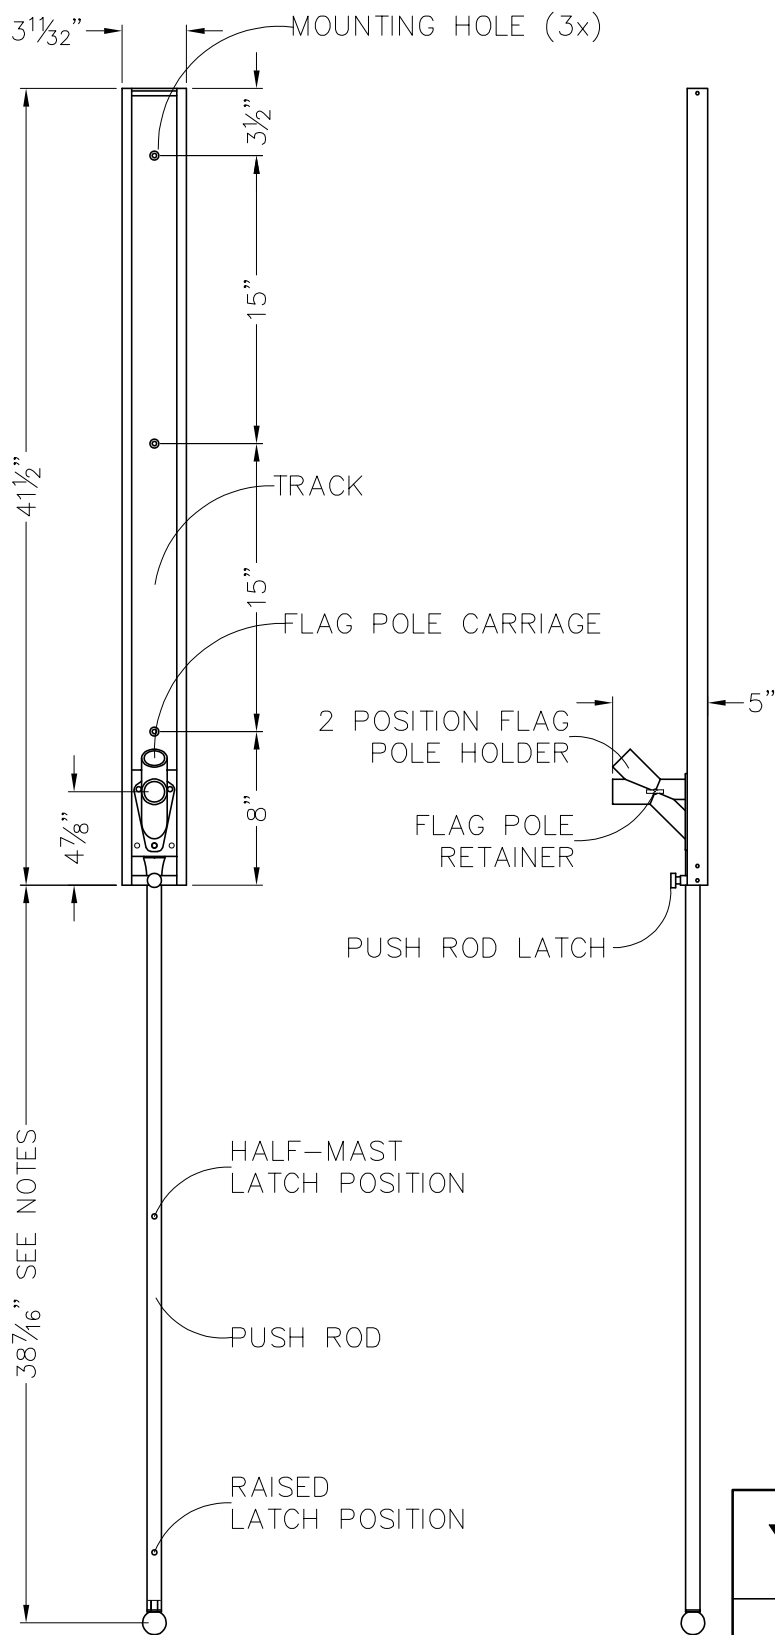

SHOWN WITH FLAG POLE CARRIAGE IN LOWERED POSITION

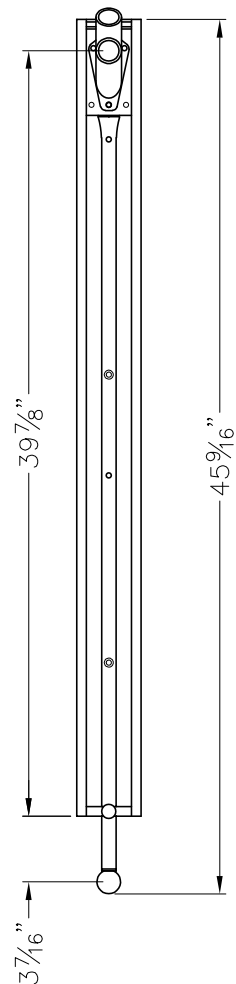

SHOWN WITH FLAG POLE CARRIAGE IN RAISED POSITION

NOTES:

1. CONFIRM THERE IS SUFFICIENT SPACE BELOW VERSAMAST FOR PUSH ROD IN LOWERED POSITION.
2. MINIMUM RECOMMENDED MOUNTING HEIGHT TO BOTTOM OF VERSAMAST TRACK IS 48"
3. FINISH IS WHITE POWDER COAT. OTHER COLORS ARE AVAILABLE.

VERSAMAST

PRODUCT APPLICATION DRAWING
VERSAMAST FLAG & BANNER SYSTEM
MODEL VM136A

SIZE A	DWG NO VM136A	REV A	SCALE 1:10
			SHEET 1 OF 1

THIS DRAWING & THE INFORMATION IT CONTAINS IS PROPRIETARY & CONFIDENTIAL. IT SHALL NOT BE USED IN WHOLE OR IN PART WITHOUT THE EXPRESS WRITTEN CONSENT OF SPECBOUND DESIGNS, LLC